
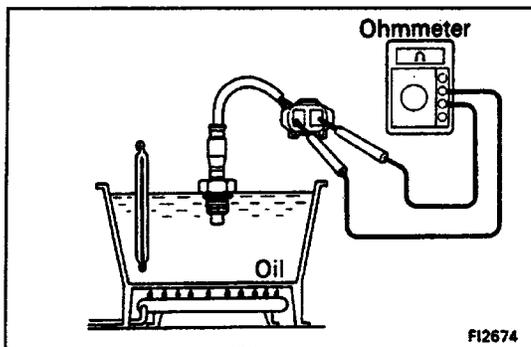


## EGR GAS TEMPERATURE SENSOR (California and C & C)

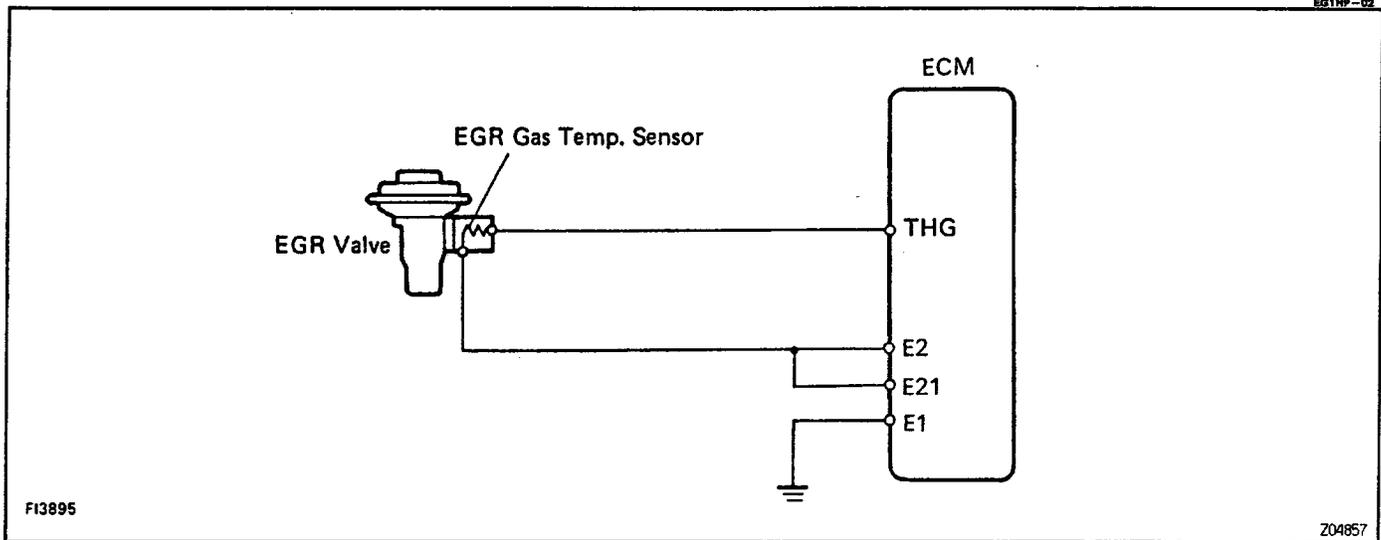

### EGR GAS TEMP. SENSOR INSPECTION MEASURE RESISTANCE OF EGR GAS TEMP. SENSOR

Using an ohmmeter, measure the resistance between both terminals.

#### Resistance:

69 – 89 k $\Omega$  50°C (122°F)

11 – 15 k $\Omega$  100°C (212°F)

2 – 4 k $\Omega$  150°C (302°F)

If the resistance is not as specified, replace the sensor.